

Topics : Current Electricity, Heat, Kinematics, Simple Harmonic Motion, Capacitance

Type of Questions

Single choice Objective ('-1' negative marking) Q.1 to Q.5

(3 marks, 3 min.)

M.M., Min.

[15, 15]

Multiple choice objective ('-1' negative marking) Q.6

(4 marks, 4 min.)

[4, 4]


Comprehension ('-1' negative marking) Q.7 to Q.9

(3 marks, 3 min.)

[9, 9]

1. In the, Ohm's law experiment to find resistance of unknown resistor R, the arrangement is as shown.

The resistance measured is given by $R_{\text{measured}} = \frac{V}{i}$, V = voltage reading of voltmeter, i = current reading of ammeter. The ammeters and the voltmeter used are not ideal, and have resistances R_A and R_V respectively. For arrangement shown, the measured resistance is




- (A) $R + R_V$ (B) $R + R_A$ (C) $\frac{RR_V}{R+R_V}$ (D) $\frac{RR_V}{R+R_V} + R_A$

2. Two identical plates with thermal conductivities K and 3K are joined together to form a single plate of double thickness. The equivalent thermal conductivity of one composite plate so formed for the flow of heat through its thickness is:

- (A) K (B) 1.5 K (C) 2.5K (D) 3K

3. The acceleration time graph of a particle moving along a straight line is as shown in the figure. At what time the particle acquires its velocity equal to initial velocity ?



- (A) 12 sec (B) 5 sec
(C) 8 sec (D) none of these

4. As the distance between the plates of a parallel plate capacitor is decreased

- (A) chances of electrical break down will increase if potential difference between the plates is kept constant.
(B) chances of electrical break down will decrease if potential difference between the plates is kept constant.
(C) chances of electrical break down will increase if charge on the plates is kept constant.
(D) chances of electrical break down will decrease if charge on the plates is kept constant.




Answers Key

1. (B) 2. (B) 3. (C) 4. (A)
 5. (B) 6. (B,D) 7. (D) 8. (B)
 9. (C)

Hints & Solutions

1. Potential drop. $\rightarrow V = i (R + R_A)$

$$\frac{V}{i} = R + R_A = R_{\text{measured}}$$

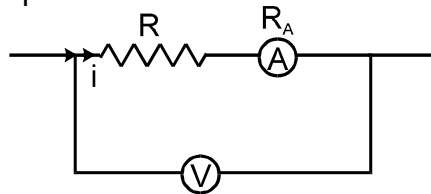

4. When charge on plate is constant electric field

remains constant $E = \frac{Q}{2A\epsilon_0}$

In case when potential difference is constant $E =$

$$\frac{V}{d}$$

Electric field increases when 'd' decreases and hence chances of breakdown increases.

5. $C = k \epsilon_0 A / d$

$$A_f = 4A_i$$

$$d_f = 2 d_i$$

Because, ALL linear dimensions are doubled so capacitance become doubled.

6. $x = 3 \sin 100 t + 8 \cos^2 50 t$

$$= 3 \sin 100 t + \frac{8[1 + \cos 100t]}{2}$$

$$x = 4 + 3 \sin 100 t + 4 \cos 100 t$$

$$(x - 4) = 5 \sin (100t + \phi) \quad \left\{ \tan \phi = \frac{4}{3} \right\}$$

Amplitude = 5 units

Maximum displacement = 9 units.



7. $C = k \epsilon_0 A/d$
formula suggest that it depends on area, separation
and surrounding medium.

9. Most Appropriate capacitor is a capacitors of high
capacitance & high dielectric strength. By dielectric
strength

$$C > B > A > D$$

By capacitance $C = \frac{k\epsilon_0 A}{d}$

$$C = D > B > A$$

So C is best.

