Part I

MAGNETIC PROPERTY

MAGNETIC FORCE ON A CURRENT CARRYING WIRE

$i = jA = nev_dA$

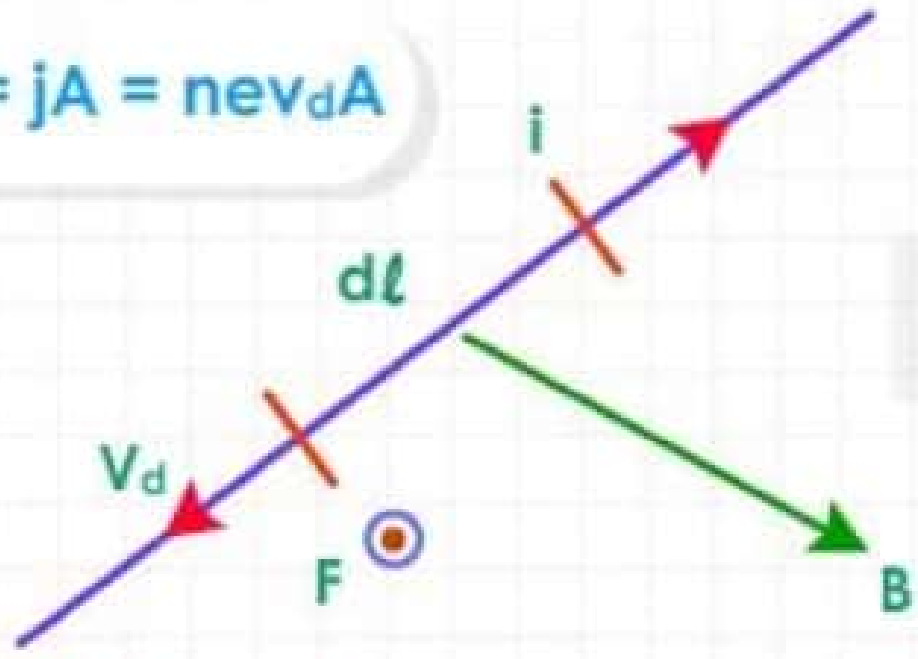

v_d = Drift speed
n = No. of free electrons per unit volume
j = Current density

$\vec{F}_{res} = i\vec{L} \times \vec{B}$

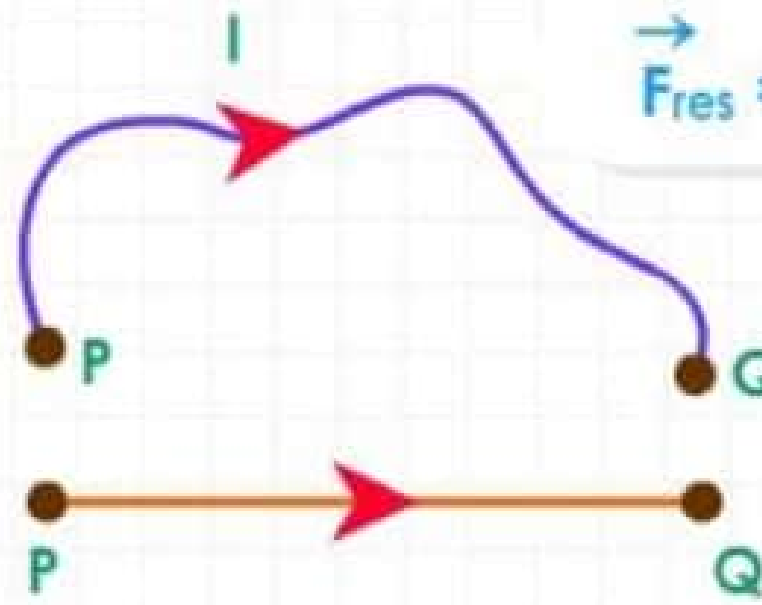

$\vec{L}$ = Vector length of the wire

DIRECTION OF FORCE

The direction of force is always perpendicular to the plane containing $i.d\vec{L}$ and $\vec{B}$ and is same as that of cross-product of two vectors $(\vec{a} \times \vec{b})$ with $a = i.d\vec{L}$ and $b = \vec{B}$

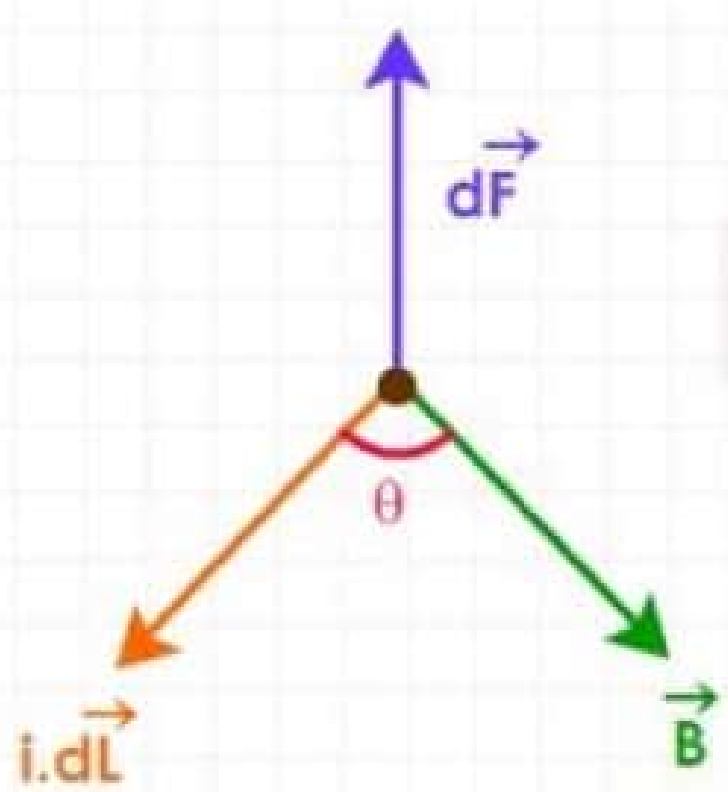

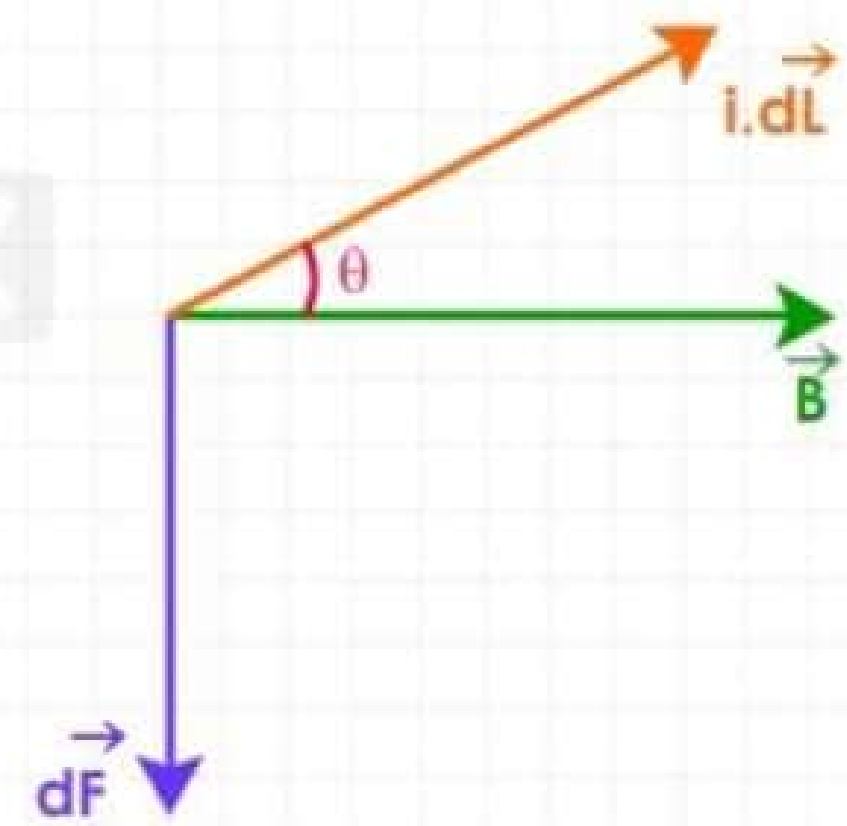

The direction of force when current element $i.d\vec{L}$ and $\vec{B}$ are perpendicular to each other can also be determined by applying either of the following rules:

1. **Fleming's Left-hand Rule :** Stretch the forefinger, central finger and thumb of the left hand mutually perpendicular. Then if the forefinger points in the direction of the field $(\vec{B})$ and the central finger is in the direction of current, the thumb will point in the direction of force (or motion).

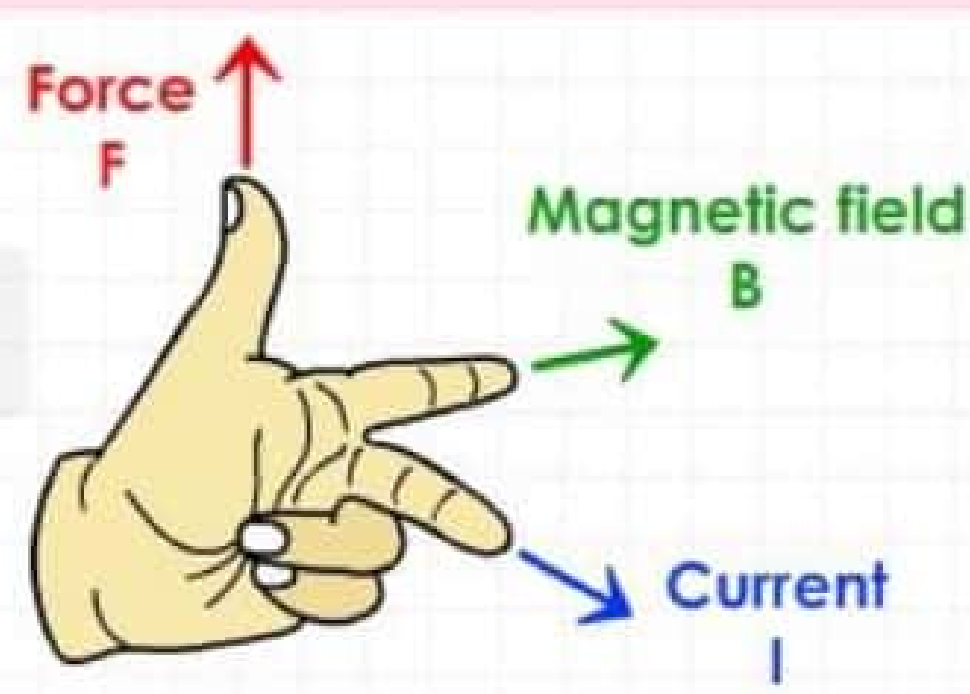

2. **Right-hand Palm rule** : Stretch the fingers and thumb of the right-hand at right angles to each other. To find the direction of the magnetic force on a positive moving charge, the thumb of the right hand ponts in the direction of velocity of particle **v**, the fingers in the direction of Magnetic Field B, then the Force **F** is directed perpendicular to the right hand palm

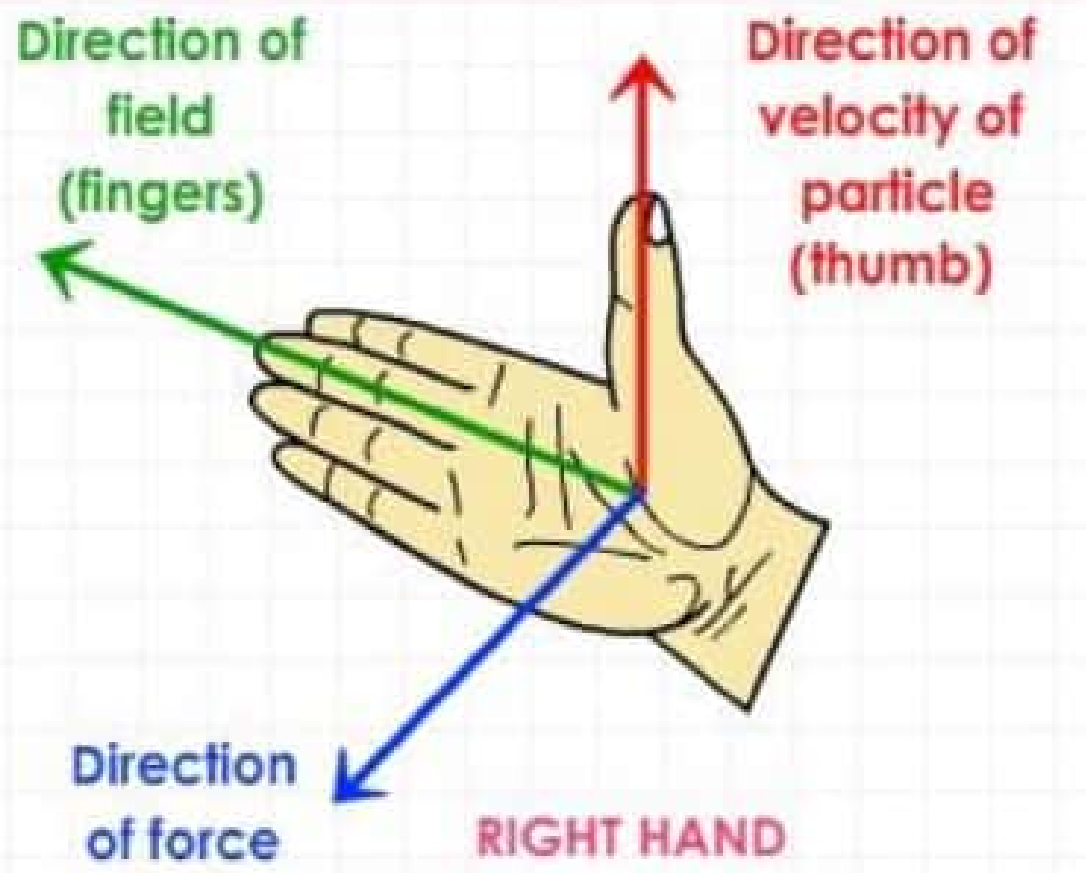

CURRENT LOOP IN A UNIFORM MAGNETIC FIELD

MAGNETIC MOMENT

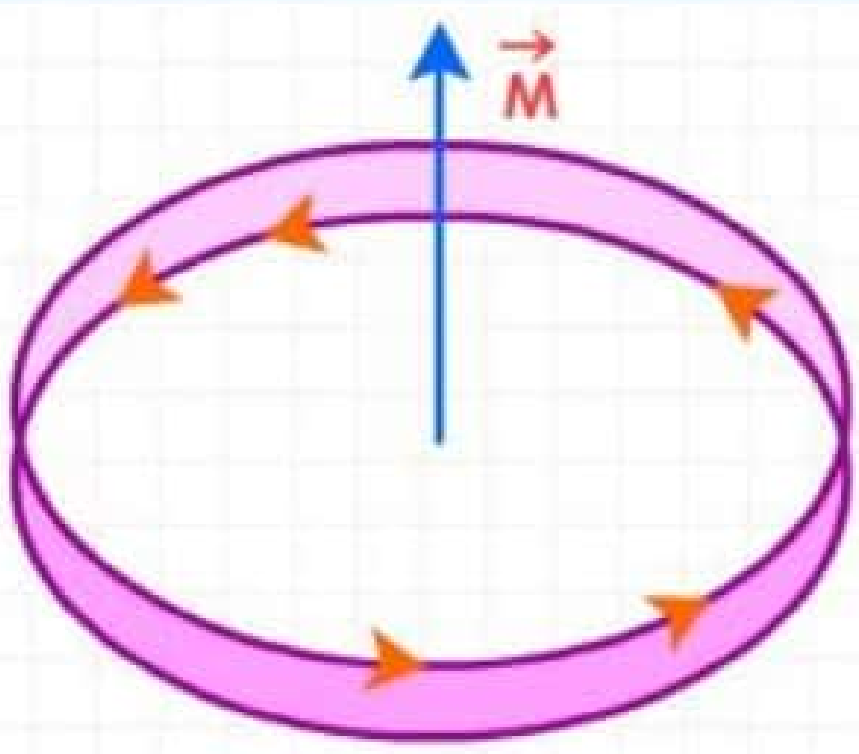

$$\vec{M} = Ni\pi R^2 = NiA$$

A = Area of loop | R = Radius of loop
N = No. of loops | I = Current

TORQUE ON A CURRENT LOOP

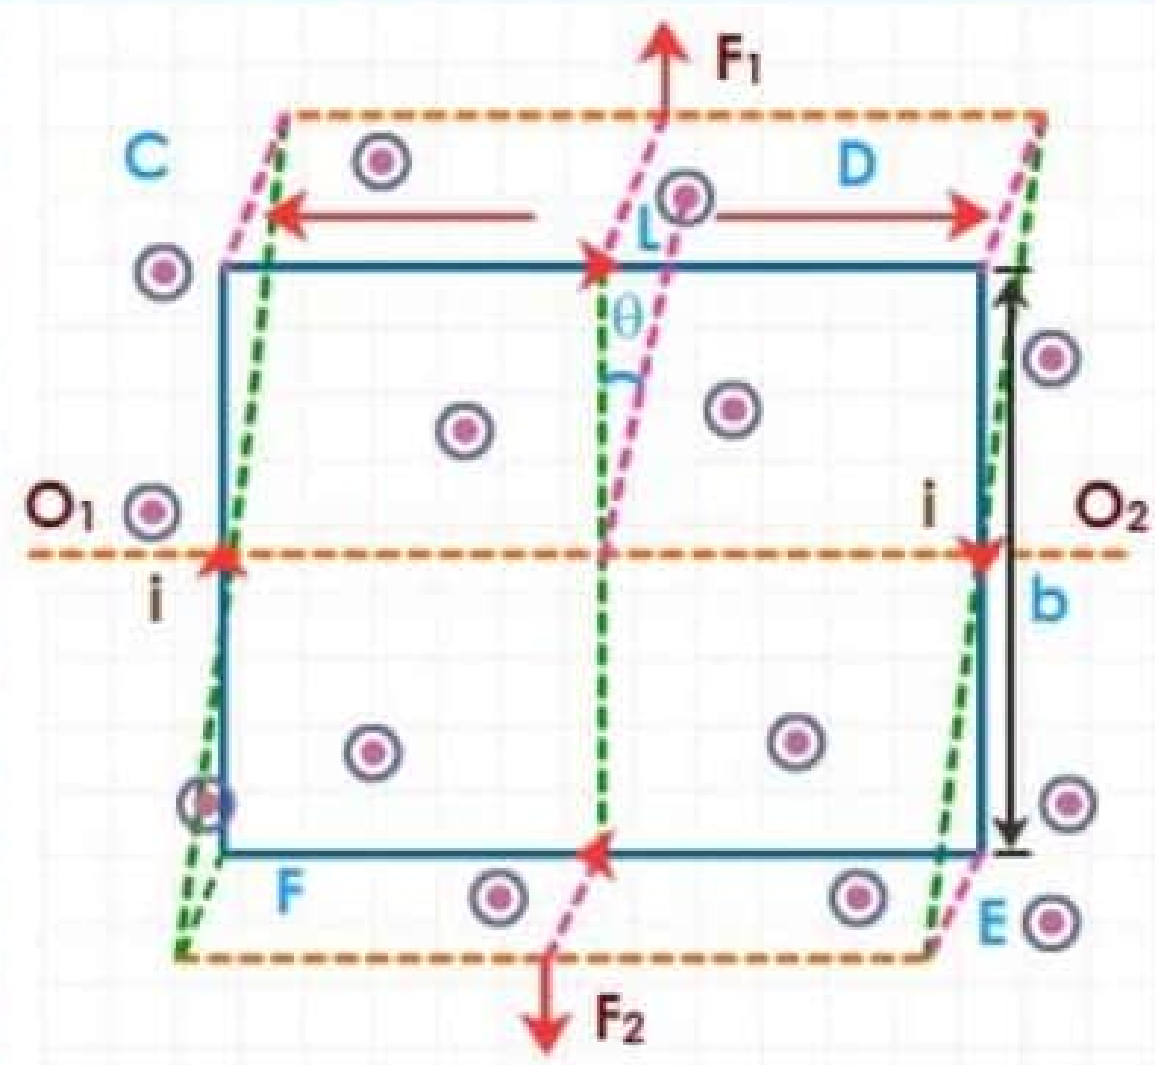

$$\vec{\tau} = \vec{M} \times \vec{B}$$

MAGNETIC FIELD AND STRENGTH OF MAGNETIC FIELD

$$\vec{B} = \frac{\vec{F}}{M}$$

S.I. unit of $\vec{B}$ is Tesla or weber/m^2

MAGNETIC IN AN EXTERNAL UNIFORM MAGNETIC FIELD

$F_{res} = 0$ (for any angle)

$\tau = MB \sin\theta$